



HeartFelt® modular felt Ceiling System

PRODUCT CHARACTERISTICS:

- Modular linear felt system
- Panel dimensions **Boxshaped:**
40 x 55 mm, 40 x 80 mm, 40 x 105 mm
Rounded: 40 x 64 mm
- 40 x 55 mm panels are available in 5 shades of grey and 5 earth tones
- 40 x 64 mm, 40 x 80 mm and 40 x 105 mm panels are available in 5 shades of grey
- Panel length 40HL55 : 1000 - 6000 mm
Panel length 40HR64 : 1000 - 6000 mm
Panel length 40HL80 : 1000 - 6000 mm
Panel length 40HL105 : 1000 - 4000 mm
- 16 standard carrier modules offering different joint widths


www.hunterdouglasarchitectural.eu

© Registered trademark - a HunterDouglas® product


HunterDouglas 
Architectural

SYSTEM OVERVIEW


- 1 = HeartFelt® panel 40HL55
- 2 = HeartFelt® panel 40HR64
- 3 = HeartFelt® panel 40HL80
- 4 = HeartFelt® panel 40HL105
- 5 = Panel splice (available for all Panels)
- 6 = Carrier
- 7 = Carrier splice
- 8 = Stabilisation bracket
- 9 = Stabilisation profile
- 10 = Suspension
- 11 = Endcaps

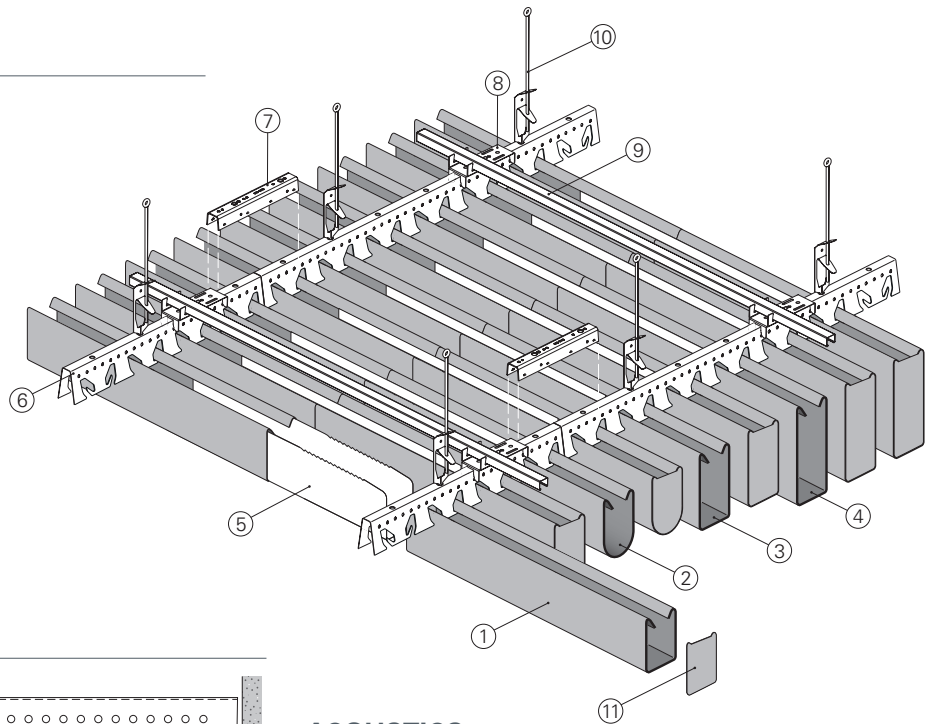

PROFILE

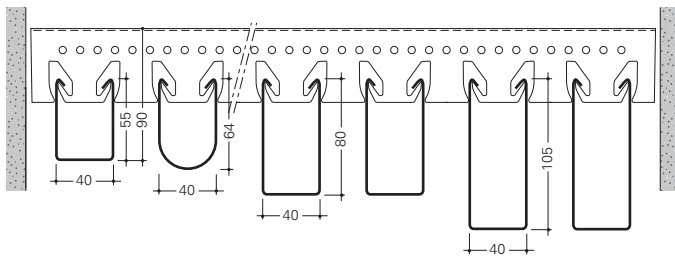

MAXIMUM SPAN

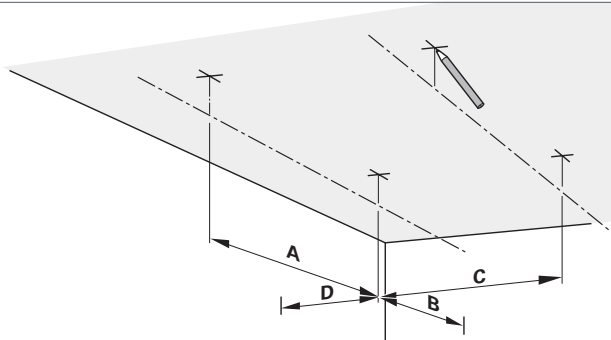

Panel	Maximum Carrier span		Maximum Panel span	
	A	B	C	D
HeartFelt® 55/64/80	1500	300	1200	150
HeartFelt® 105	1500	300	900	150

MATERIAL PROPERTIES

- **Material:** non-woven, thermo formable PES-fibers
- **Fire retardant:** class B-s1,d0 EN 13501-1
- **Weight:** Panel 40 x 55: 2.9 kg/m² (M50) - 1.7 kg/m² (M100)
- **Light reflection:** depending on colour
- **Exposure class:** A and B EN 13964

CERTIFICATIONS

- Indoor Air Comfort Gold
- French VOC-regulation class A+
- Cradle to Cradle™ Level Bronze
- Oeko-tex Standard 100 klasse IV
- SundaHus Miljödata klasse A
- GreenGuard Gold



Cradle to Cradle Certified™ is a certification mark licensed by the Cradle to Cradle Products Innovation Institute.

ACOUSTICS - α_w

Panel 40HL55 - Panel 40HR64

Module (mm)	Joint (mm)	Openness %	α_w
M50	10	20%	0.70 (H)
M60	20	33%	0.65 (H)
M70	30	43%	0.60 (H)
M70*	30	43%	1.00 (H)
M80	40	50%	0.50 (H)
M90	50	55%	0.45 (H)
M100	60	60%	0.45 (H)

*Ceiling panels covered with mineral wool tiles or acoustic tiles from PES.

Panel 40HL80

Module (mm)	Joint (mm)	Openness %	α_w
M80	40	50%	0.50 (H)
M90	50	55%	0.47 (H)
M100	60	60%	0.45 (H)
M150	110	73%	0.40 (H)

Panel 40HL105

Module (mm)	Joint (mm)	Openness %	α_w
M 100	60	60%	0.50 (H)
M 110	70	64%	0.48 (H)
M 120	80	67%	0.47 (H)
M 150	110	73%	0.42 (H)
M 200	160	80%	0.38 (H)

HunterDouglas 
Architectural

Myynti Suomessa:
Elam Oy
elam@elam.fi
019-6871103



© Registered trademark of Hunter Douglas - a HunterDouglas® product Pats. & Pats. Pend. - Technical data subject to change without notice.

© Copyright Hunter Douglas 2022. No rights can be derived from copy, text pertaining to illustrations or samples. Subject to changes in materials, parts, compositions, designs, versions, colours etc., even without notice.